


TGW ピストンシール (NOK社:SPGW互換品)

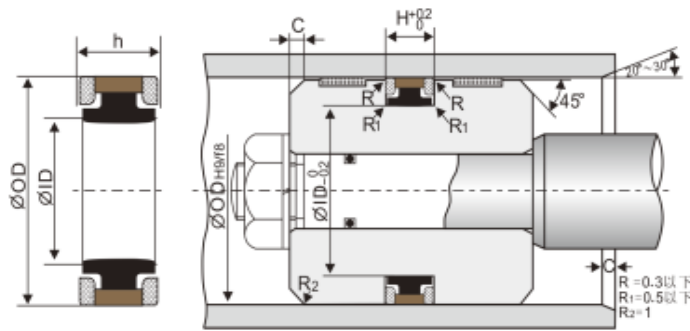


仕様	
材質	PTFE+NY+NBR
温度域	-40°C~110°C
圧力	500kgf/cm ²
速度	1.5m/s

単位:mm

商品コード	型番	OD	ID	h	H	C
1010-00010	TGW-050	50	36	8.5	9	4
1010-00020	TGW-055	55	41	8.5	9	4
1010-00030	TGW-060	60	46	8.5	9	4
1010-00040	TGW-065(ヤンマー)	65	51	8.5	9	4
1010-00050	TGW-065	65	50	10.5	11	5
1010-00060	TGW-070	70	55	10.5	11	5
1010-00070	TGW-075	75	60	10.5	11	5
1010-00080	TGW-080-65-10.5	80	65	10.5	11	5
1010-00090	TGW-080-65-12.5	80	65	12.5	13	5
1010-00100	TGW-085	85	70	10.5	11	5
1010-00110	TGW-090-75-10.5	90	75	10.5	11	5
1010-00120	TGW-090-75-12.5	90	75	12.5	13	5
1010-00130	TGW-095	95	80	10.5	11	5
1010-00140	TGW-100	100	85	12	12.5	5
1010-00150	TGW-105	105	90	12	12.5	5
1010-00160	TGW-110	110	95	12	12.5	5
1010-00170	TGW-115	115	100	12	12.5	6.5
1010-00180	TGW-120	120	105	12	12.5	6.5
1010-00190	TGW-125	125	102	15.5	16	6.5
1010-00200	TGW-130	130	107	15.5	16	6.5
1010-00210	TGW-135	135	112	15.5	16	6.5
1010-00220	TGW-140	140	117	15.5	16	6.5
1010-00230	TGW-145	145	122	15.5	16	6.5
1010-00240	TGW-150	150	127	15.5	16	6.5
1010-00250	TGW-155	155	132	15.5	16	6.5
1010-00270	TGW-160-145-12.5	160	145	12.5	13	6.5
1010-00260	TGW-160-137-15.5	160	137	15.5	16	6.5
1010-00280	TGW-165	165	142	15.5	16	6.5
1010-00290	TGW-170-147-15.5	170	147	15.5	16	6.5
1010-00295	TGW-170-155-17.7	170	155	17.7	18	6.5
1010-00300	TGW-180	180	157	15.5	16	6.5
1010-00310	TGW-185	185	162	15.5	16	6.5

TGW ピストンシール (NOK社:SPGW互換品)

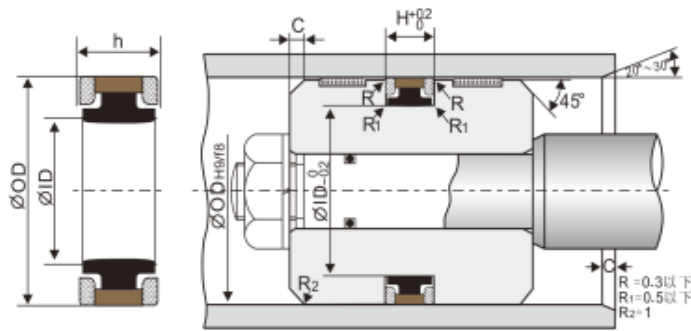

仕様	
材質	PTFE+NY+NBR
温度域	-40°C~110°C
圧力	500kgf/cm ²
速度	1.5m/s

単位:mm

商品コード	型番	OD	ID	h	H	C
1010-00320	TGW-190	190	167	15.5	16	6.5
1010-00330	TGW-200	200	177	15.5	16	6.5
1010-00332	TGW-210	210	187	15.5	16	6.5
1010-00334	TGW-220	220	197	15.5	16	6.5
1010-00340	TGW-225-202-15.5	225	202	15.5	16	6.5
1010-00350	TGW-225-202-17	225	202	17.0		
1010-00360	TGW-230	230	207	15.5	16	6.5
1010-00365	TGW-240	240	217	15.5	16	6.5
1010-00370	TGW-250-222-17	250	222	17.0	17.5	6.5
1010-00380	TGW-250-230-21.2	250	230	21.2	21.5	7.5
1010-00390	TGW-260	260	232	17.0	17.5	7.5
1010-00392	TGW-270	270	242	17.0	17.5	7.5
1010-00394	TGW-280	280	252	17.0	17.5	7.5
1010-00400	TGW-300	300	272	17.0	17.5	7.5
1010-00410	TGW-320	320	292	17.0	17.5	7.5
1010-00415	TGW-330	330	302	17.0	17.5	7.5