


# TG ピストンシール (NOK社:SPG互換品)

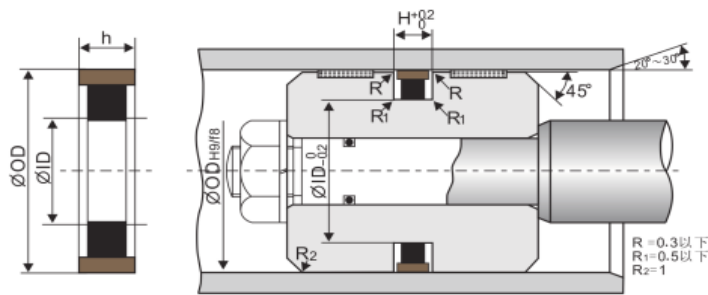


仕様	
材質	PTFE+NBR
温度域	-40°C~110°C
圧力	350kgf/cm <sup>2</sup>
速度	1.5m/s

単位: mm

商品コード	型番	OD	ID	h	H
1010-01560	TG-035	35	25.5	4.3	4.5
1010-01570	TG-040	40	30	4.3	4.5
1010-01580	TG-045-34	45	34	4.8	5
1010-01585	TG-045-35	45	35	4.3	4.5
1010-01590	TG-050-39	50	39	4.8	5
1010-01595	TG-050-40	50	40	4.3	4.5
1010-01600	TG-055	55	45	4.3	4.5
1010-01610	TG-060-49	60	49	4.8	5
1010-01615	TG-060-50	60	50	4.3	4.5
1010-01630	TG-063	63	48	7.3	7.5
1010-01620	TG-065-50	65	50	7.3	7.5
1010-01640	TG-065-55	65	55	4.3	4.5
1010-01650	TG-070-55	70	55	7.3	7.5
1010-01660	TG-070-59	70	59	4.8	5
1010-01670	TG-075	75	60	7.3	7.5
1010-01690	TG-080-65	80	65	7.3	7.5
1010-01680	TG-080-69	80	69	4.8	5
1010-01700	TG-085	85	70	7.3	7.5
1010-01710	TG-090-75	90	75	7.3	7.5
1010-01720	TG-090-79	90	79	5.8	6
1010-01725	TG-095	95	80	7.3	7.5
1010-01730	TG-100-85-5.8	100	85	5.8	6
1010-01740	TG-100-85-7.3	100	85	7.3	7.5
1010-01750	TG-110-94-5.8	110	94	5.8	6
1010-01760	TG-110-94-7.3	110	94	7.3	7.5
1010-01770	TG-112	112	96	7.3	7.5
1010-01780	TG-115	115	99	7.3	7.5
1010-01790	TG-120	120	104	7.3	7.5
1010-01800	TG-125	125	109	7.3	7.5
1010-01810	TG-127	127	111	7.3	
1010-01820	TG-130	130	114	7.3	7.5
1010-01840	TG-140-122	140	122	7.7	8
1010-01830	TG-140-124	140	124	7.3	7.5
1010-01850	TG-150	150	134	7.3	7.5
1010-01860	TG-160	160	144	7.3	7.5
1010-01870	TG-170	170	148	10.8	11
1010-01880	TG-180	180	158	10.8	11
1010-01890	TG-190	190	168	10.8	11
1010-01910	TG-200	200	178	10.8	11

# TG ピストンシール (NOK社:SPG互換品)

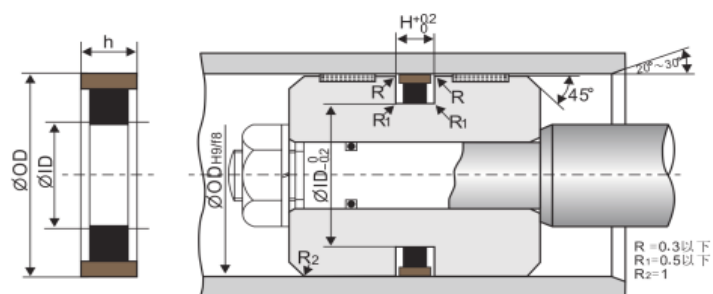

仕様	
材質	PTFE+NBR
温度域	-40°C~110°C
圧力	350kgf/cm <sup>2</sup>
速度	1.5m/s

単位: mm

商品コード	型番	OD	ID	h	H
<b>Kubota用特殊</b>					
1010-01950	TG-050	50	39	4.8	5
1010-01960	TG2-055	55	45	3.8	5
1010-01970	TG2-060	60	49	4.8	5
1010-01980	TG2-065	65	50	4.8	5
1010-01990	TG-070	70	59	4.8	5
1010-01995	TG-100	100	86	5.8	5
1010-01900	TG-195	195	173	10.8	5
1010-01920	TG-250	250	228	10.8	5