


L-TYPE バッファースील

(トレルボルグ社:ステップシール互換品)

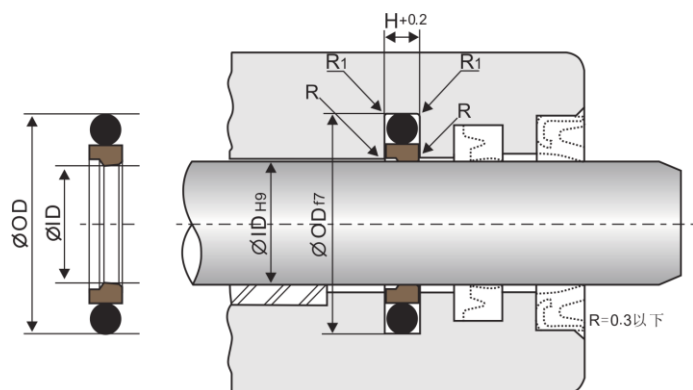


仕様	
材質	PTFE+NBR
温度域	-40°C~110°C
圧力	350kgf/cm ²
速度	1.5m/s

単位:

商品コード	型番	ID	OD	H
	L-TYPE 018	18	25.5	3.2
	L-TYPE 022	22	33	4.2
	L-TYPE 028	28	39	4.2
	L-TYPE 030	30	40.7	4.2
	L-TYPE 035	35	45.7	4.2
	L-TYPE 036	36	47	4.2
	L-TYPE 050	50	60.7	4.2
	L-TYPE 055	55	65.7	4.2
1310-00470	L-TYPE 040	40	55.5	6.3
1310-00480	L-TYPE 045	45	60.5	6.3
1310-00490	L-TYPE 050	50	65.5	6.3
1310-00500	L-TYPE 055	55	70.5	6.3
	L-TYPE 056	56	71.5	6.3
1310-00510	L-TYPE 060	60	75.5	6.3
1310-00520	L-TYPE 065	65	80.5	6.3
	L-TYPE 068	68	83.5	6.3
1310-00530	L-TYPE 070	70	85.5	6.3
1310-00540	L-TYPE 075	75	90.5	6.3
1310-00550	L-TYPE 080	80	95.5	6.3
1310-00570	L-TYPE 085	85	100.5	6.3
1310-00580	L-TYPE 090	90	105.5	6.3
1310-00590	L-TYPE 095	95	110.5	6.3
	L-TYPE 098	98	113.5	6.3
1310-00600	L-TYPE 100	100	115.5	6.3
1310-00610	L-TYPE 105	105	120.5	6.3
1310-00620	L-TYPE 110	110	125.5	6.3
1310-00630	L-TYPE 115	115	130.5	6.3
1310-00640	L-TYPE 120	120	135.5	6.3
1310-00650	L-TYPE 125	125	140.5	6.3
1310-00660	L-TYPE 130	130	145.5	6.3
	L-TYPE 132	132	147.5	6
1310-00670	L-TYPE 135	135	150.1	6.3
1310-00680	L-TYPE 138	138	153.1	6.3
1310-00690	L-TYPE 140	140	155.5	6.3
	L-TYPE 145	145	160.5	6.3
1310-00700	L-TYPE 150	150	165.1	6.3
	L-TYPE 155	155	170.1	6.3
1310-00710	L-TYPE 160	160	175.5	6.3
	L-TYPE 165	165	180.1	6.3
1310-00720	L-TYPE 170	170	185.5	6.3
1310-00730	L-TYPE 180	180	195.5	6.3
	L-TYPE 195	195	210.1	6.3

L-TYPE バッファーシール
 (トレルボルグ社:ステップシール互換品)

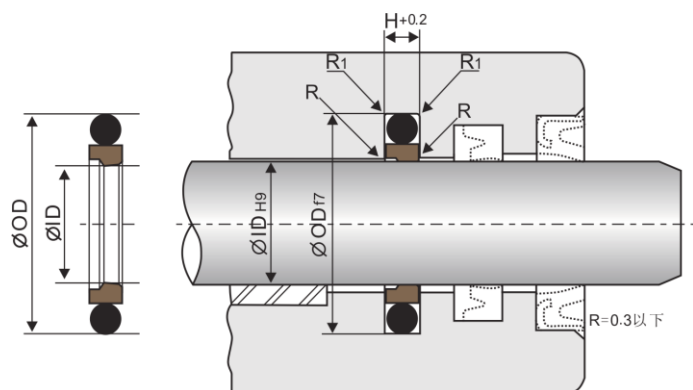

仕様	
材質	PTFE+NBR
温度域	-40°C~110°C
圧力	350kgf/cm ²
速度	1.5m/s

単位:

商品コード	型番	ID	OD	H
	L-TYPE 080	80	100.5	8.1
	L-TYPE 130	130	150.5	8.1
	L-TYPE 180	180	200.5	8.1