


# WRNF ウェアリング

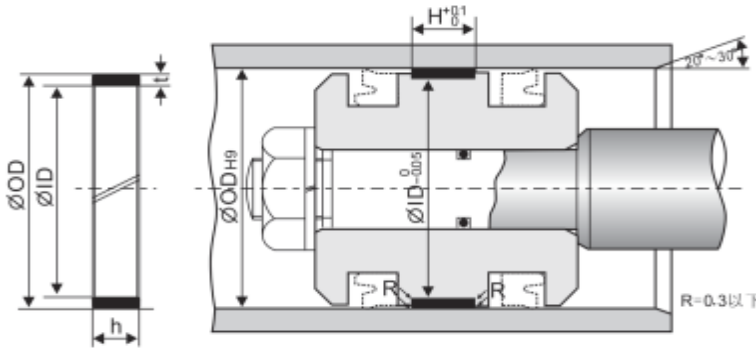


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
<b>2mm厚み</b>			
1510-01121	WRNF-090	90-86-6	90-6/2
1510-01000	WRNF-040	40-36-7.8	40-7.8/2
	WRNF-045	45-41-9.5	45-9.5/2
	WRNF-050	50-46-9.5	50-9.5/2
	WRNF-049	49-45-9.7	49-9.7/2
	WRNF-054	54-50-9.7	54-9.7/2
	WRNF-063	63-59-9.7	63-9.7/2
	WRNF-064	64-60-9.7	64-9.7/2
	WRNF-080	80-76-9.7	80-9.7/2
	WRNF-050	50-46-10	50-10/2
	WRNF-062	62-58-10	62-10/2
	WRNF-065	65-61-10	65-10/2
	WRNF-075	75-71-15	75-15/2
	WRNF-045	45-41-20	45-20/2
<b>2.5mm厚み</b>			
	WRNF-045	45-40-5.2	45-5.2/2.5
	WRNF 075	75-70-5.4	75-5.4/2.5
	WRNF-063	63-58-5.5	63-5.5/2.5
	WRNF-045	45-40-5.6	45-5.6/2.5
	WRNF 075	75-70-5.8	75-5.8/2.5
	WRNF-090	90-85-5.9	90-5.9/2.5
	WRNF-095	95-90-5.9	95-5.9/2.5
	WRNF-100	100-95-5.9	100-5.9/2.5
	WRNF-105	105-100-5.9	105-5.9/2.5
	WRNF-110	110-105-5.9	110-5.9/2.5
	WRNF-070	70-65-6.9	70-6.9/2.5
	WRNF-040	40-35-7.7	40-7.7/2.5
	WRNF-050	50-45-7.7	50-7.7/2.5
	WRNF-055	55-50-7.7	55-7.7/2.5
	WRNF-063	63-58-7.7	63-7.7/2.5
	WRNF-070	70-65-7.7	70-7.7/2.5
	WRNF-080	80-75-7.7	80-7.7/2.5
	WRNF-085	85-80-7.9	85-7.9/2.5
	WRNF-090	90-85-7.9	90-7.9/2.5
	WRNF-110	110-105-7.9	110-7.9/2.5

# WRNF ウェアリング

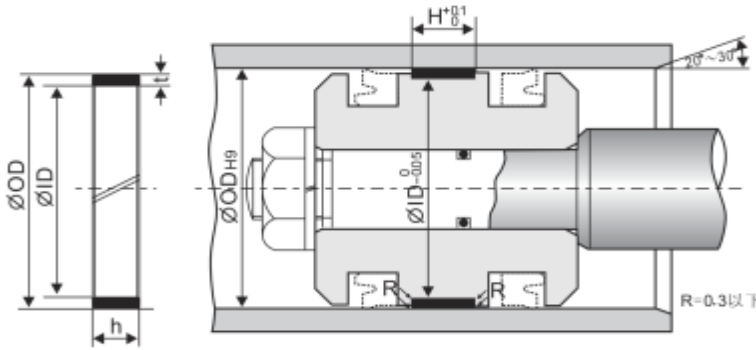


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
	WRNF-115	115-110-7.9	115-7.9/2.5
	WRNF-120	120-115-7.9	120-7.9/2.5
	WRNF-125	125-120-7.9	125-7.9/2.5
	WRNF-130	130-125-7.9	130-7.9/2.5
	WRNF-135	135-130-7.9	135-7.9/2.5
	WRNF-030	30-25-9.5	30-9.5/2.5
	WRNF-050	50-45-9.5	50-9.5/2.5
	WRNF-060	60-55-9.5	60-9.5/2.5
	WRNF 061	61-56-9.5	61-9.5/2.5
	WRNF-065	65-60-9.5	65-9.5/2.5
	WRNF-070	70-65-9.5	70-9.5/2.5
	WRNF-075	75-70-9.5	75-9.5/2.5
	WRNF-080	80-75-9.5	80-9.5/2.5
	WRNF-085	85-80-9.5	85-9.5/2.5
1510-01120	WRNF-090	90-85-9.5	90-9.5/2.5
	WRNF-105	105-100-9.5	105-9.5/2.5
	WRNF-110	110-105-9.5	110-9.5/2.5
	WRNF-115	115-110-9.5	115-9.5/2.5
	WRNF-120	120-115-9.5	120-9.5/2.5
	WRNF-125	125-120-9.5	125-9.5/2.5
	WRNF-135	135-130-9.5	135-9.5/2.5
	WRNF-140	140-135-9.5	140-9.5/2.5
	WRNF-145	145-140-9.5	145-9.5/2.5
	WRNF-170	170-165-9.5	170-9.5/2.5
	WRNF-090	90-85-9.7	90-9.7/2.5
	WRNF-100	100-95-9.7	100-9.7/2.5
	WRNF-130	130-125-9.7	130-9.7/2.5
	WRNF-150	150-145-9.7	150-9.7/2.5
	WRNF 055	55-50-9.8	55-9.8/2.5
	WRNF-175	175-170-9.8	175-9.8/2.5
	WRNF-185	185-180-9.8	185-9.8/2.5
	WRNF-040	40-35-10	40-10/2.5
	WRNF-080	80-75-10	80-10/2.5
	WRNF-100	100-95-11.5	100-11.5/2.5
	WRNF-140	140-135-12.5	140-12.5/2.5
	WRNF-170	170-165-12.5	170-12.5/2.5

# WRNF ウェアリング

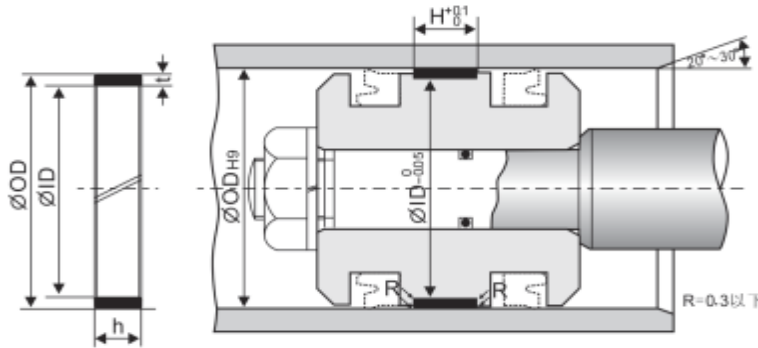


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
	WRNF-060	60-55-14.5	60-14.5/2.5
	WRNF-090	90-85-14.5	90-14.5/2.5
	WRNF 075	75-70-14.8	75-14.8/2.5
	WRNF-080	80-75-14.8	80-14.8/2.5
	WRNF-095	95-90-14.8	95-14.8/2.5
	WRNF-100	100-95-14.8	100-14.8/2.5
	WRNF-110	110-105-14.8	110-14.8/2.5
	WRNF-120	120-115-14.8	120-14.8/2.5
	WRNF-125	125-120-14.8	125-14.8/2.5
	WRNF-135	135-130-14.8	135-14.8/2.5
1510-02300	WRNF-140	140-135-14.8	140-14.8/2.5
	WRNF-145	145-140-14.8	145-14.8/2.5
	WRNF-150	150-145-14.8	150-14.8/2.5
	WRNF-155	155-150-14.8	155-14.8/2.5
	WRNF-190	190-185-14.8	190-14.8/2.5
	WRNF-200	200-195-14.8	200-14.8/2.5
	WRNF-050	50-45-15	50-15/2.5
	WRNF-085	85-80-15	85-15/2.5
	WRNF-115	115-110-15	115-15/2.5
	WRNF-160	160-155-15	160-15/2.5
	WRNF-170	170-165-15	170-15/2.5
	WRNF 055	55-50-16	55-16/2.5
	WRNF-110	110-105-19.5	110-19.5/2.5
	WRNF-075	75-70-19.8	75-19.8/2.5
	WRNF-080	80-75-19.8	80-19.8/2.5
	WRNF 090	90-85-19.8	90-19.8/2.5
	WRNF 105	105-100-19.8	105-19.8/2.5
	WRNF 120	120-115-19.8	120-19.8/2.5
	WRNF 135	135-130-19.8	135-19.8/2.5
	WRNF-145	145-140-19.8	145-19.8/2.5
	WRNF-190	190-185-19.8	190-19.8/2.5
	WRNF-050	50-45-20	50-20/2.5
	WRNF-070	70-65-20	70-20/2.5
	WRNF 071	71-66-20	71-20/2.5
	WRNF-085	85-80-20	85-20/2.5
	WRNF-125	125-120-20	125-20/2.5

# WRNF ウェアリング

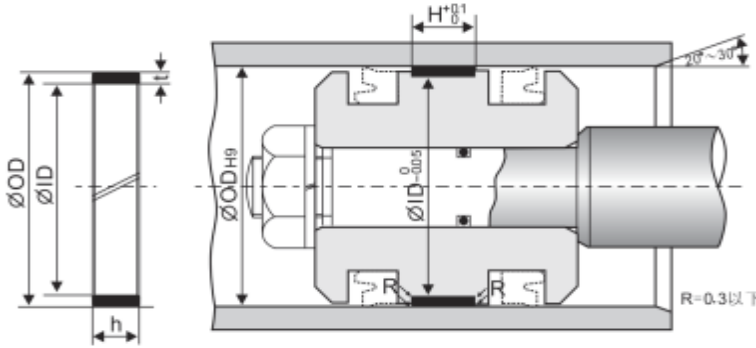


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
	WRNF 105	105-100-24.8	105-24.8/2.5
	WRNF-110	110-105-24.8	110-24.8/2.5
	WRNF 135	135-130-24.8	135-24.8/2.5
	WRNF 060	60-55-25	60-25/2.5
	WRNF 075	75-70-25	75-25/2.5
	WRNF 085	85-80-25	85-25/2.5
1510-01480	WRNF-100	100-95-25	100-25/2.5
	WRNF-127	127-122-25	127-25/2.5
	WRNF-190	190-185-25	190-25/2.5
	WRNF-200	200-195-25	200-25/2.5
	WRNF-170	170-165-45	170-45/2.5
3mm厚み			
1510-01460	WRNF-100	100-94-5.6	100-5.6/3
1510-01760	WRNF-110	110-104-5.6	110-5.6/3
1510-01980	WRNF-120	120-114-5.6	120-5.6/3
	WRNF-065	65-59-5.9	65-5.9/3
	WRNF-075	75-69-5.9	75-5.9/3
	WRNF-085	85-79-5.9	85-5.9/3
	WRNF-100	100-94-5.9	100-5.9/3
	WRNF-110	110-104-5.9	110-5.9/3
	WRNF-120	120-114-5.9	120-5.9/3
1510-01630	WRNF 110	110-104-7	110-7/3
1510-02290	WRNF-140	140-134-8	140-8/3
1510-01280	WRNF-100	100-94-9	100-9/3
	WRNF 045	45-39-9.8	45-9.8/3
	WRNF 055	55-49-9.8	55-9.8/3
	WRNF 060	60-54-9.8	60-9.8/3
	WRNF 065	65-59-9.8	65-9.8/3
	WRNF 070	70-64-9.8	70-9.8/3
	WRNF 085	85-79-9.8	85-9.8/3
	WRNF 105	105-99-9.8	105-9.8/3
	WRNF-110	110-104-9.8	110-9.8/3
	WRNF-115	115-109-9.8	115-9.8/3
	WRNF 120	120-114-9.8	120-9.8/3
	WRNF 150	150-144-9.8	150-9.8/3
	WRNF-165	165-159-9.8	165-9.8/3

# WRNF ウェアリング

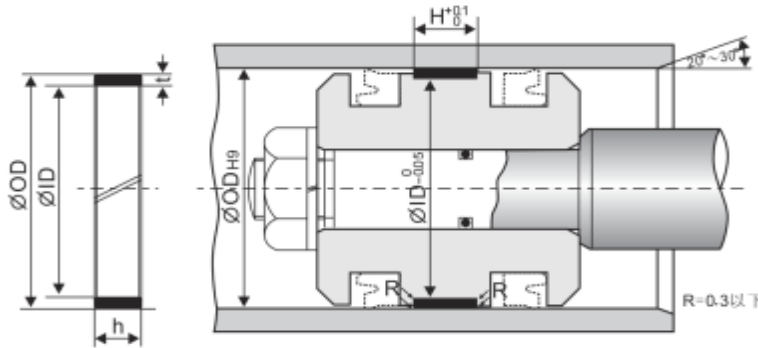


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
	WRNF-200	200-194-9.8	200-9.8/3
	WRNF-055	55-49-10.5	55-10.5/3
1510-01640	WRNF-110	110-104-11.1	110-11.1/3
1510-01900	WRNF-120	120-114-11.1	120-11.1/3
1510-01080	WRNF-090	90-84-12.5	90-12.5/3
1510-01180	WRNF-095	95-89-12.5	95-12.5/3
1510-01300	WRNF-100	100-94-12.5	100-12.5/3
1510-01540	WRNF-105	105-99-12.5	105-12.5/3
1510-01660	WRNF-110	110-104-12.5	110-12.5/3
	WRNF-056	56-50-12.7	56-12.7/3
	WRNF-080	80-74-12.7	80-12.7/3
	WRNF-076	76-70-12.8	76-12.8/3
	WRNF-086	86-80-12.8	86-12.8/3
	WRNF-100	100-94-12.8	100-12.8/3
	WRNF-126	126-120-12.8	126-12.8/3
	WRNF-150	150-144-12.8	150-12.8/3
1510-01320	WRNF-100	100-94-14.5	100-14.5/3
1510-01020	WRNF-050	50-44-14.8	50-14.8/3
	WRNF-055	55-49-14.8	55-14.8/3
	WRNF 150	150-144-14.8	150-14.8/3
	WRNF-165	165-159-14.8	165-14.8/3
	WRNF-200	200-194-14.8	200-14.8/3
1510-02740	WRNF-220	220-214-14.8	220-14.8/3
	WRNF-045	45-39-15	45-15/3
	WRNF-060	60-54-15	60-15/3
	WRNF-070	70-64-15	70-15/3
	WRNF-075	75-69-15	75-15/3
	WRNF-085	85-79-15	85-15/3
	WRNF-115	115-109-15	115-15/3
1510-01880	WRNF-120	120-114-15	120-15/3
1510-02040	WRNF-125	125-119-15	125-15/3
	WRNF 060	60-54-19.8	60-19.8/3
	WRNF 115	115-109-19.8	115-19.8/3
	WRNF 125	125-119-19.8	125-19.8/3
	WRNF-165	165-159-19.8	165-19.8/3
	WRNF-200	200-194-19.8	200-19.8/3

# WRNF ウェアリング

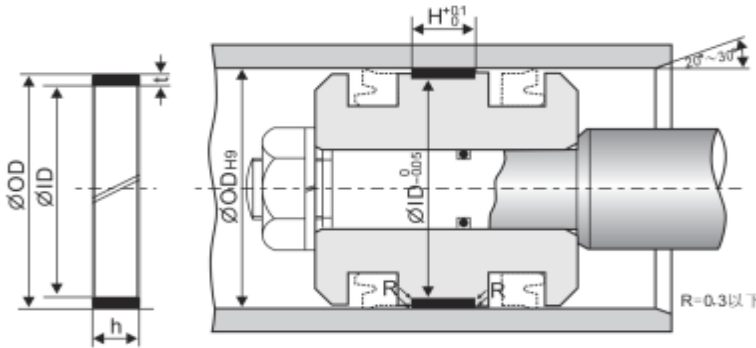


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
	WRNF-040	40-34-20	40-20/3
	WRNF-050	50-44-20	50-20/3
	WRNF-070	70-64-20	70-20/3
	WRNF-085	85-79-20	85-20/3
1510-01340	WRNF-100	100-94-20	100-20/3
1510-01360	WRNF-100	100-94-22	100-22/3
1510-01680	WRNF-110	110-104-22	110-22/3
1510-01920	WRNF-120	120-114-22	120-22/3
1510-01380	WRNF-100	100-94-22.4	100-22.4/3
1510-01940	WRNF-120	120-114-22.4	120-22.4/3
	WRNF 115	115-109-24.8	115-24.8/3
	WRNF 150	150-144-24.8	150-24.8/3
	WRNF-056	56-50-25	56-25/3
	WRNF 080	80-74-25	80-25/3
1510-01100	WRNF-090	90-84-25	90-25/3
	WRNF-095	95-89-25	95-25/3
1510-01400	WRNF-100	100-94-25	100-25/3
	WRNF-105	105-99-25	105-25/3
1510-01720	WRNF-110	110-104-25	110-25/3
	WRNF-225	225-219-25	225-25/3
	WRNF-069	69-63-30	69-30/3
	WRNF-090	90-84-30	90-30/3
1510-01440	WRNF-100	100-94-30	100-30/3
1510-01740	WRNF-110	110-104-30	110-30/3
1510-01960	WRNF-120	120-114-30	120-30/3
1510-02540	WRNF-165	165-159-30	165-30/3
	WRNF-110	110-104-35	110-35/3
	WRNF-120	120-114-35	120-35/3
	WRNF-120	120-114-40	120-40/3
	WRNF-086	86-80-50	86-50/3
1510-02720	WRNF-200	200-194-60	200-60/3
1510-02760	WRNF-220	220-214-60	220-60/3
3.175mm厚み			
	WRNF-114	114.3-107.95-12.7	114.3-12.7/3.175
	WRNF-127	127-120.65-12.7	127-12.7/3.175
	WRNF-127	127-120.65-15.8	127-15.8/3.175

# WRNF ウェアリング

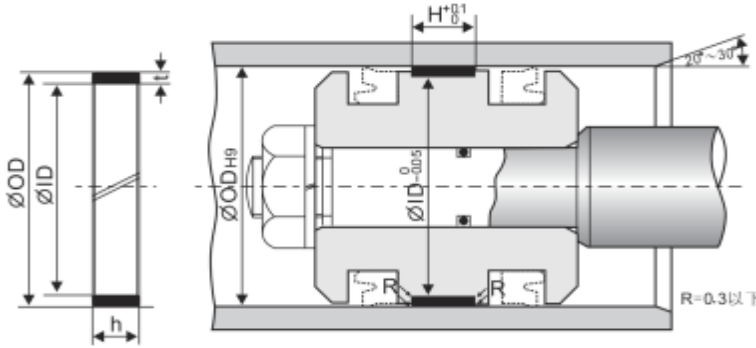


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
<b>3.5mm厚み</b>			
1510-02220	WRNF-135	135-128-9.5	135-9.5/3.5
1510-02340	WRNF-145	145-138-10	145-10/3.5
	WRNF-110	110-103-12.5	110-12.5/3.5
	WRNF-120	120-113-12.5	120-12.5/3.5
	WRNF-130	130-123-12.5	130-12.5/3.5
1510-02100	WRNF-130	130-123-14.8	130-14.8/3.5
1510-02180	WRNF-135	135-128-14.8	135-14.8/3.5
	WRNF-150	150-143-14.8	150-14.8/3.5
1510-02360	WRNF-145	145-138-15	145-15/3.5
	WRNF-140	140-133-17.5	140-17.5/3.5
	WRNF-150	150-143-17.5	150-17.5/3.5
	WRNF-130	130-123-20	130-20/3.5
	WRNF-140	140-133-20	140-20/3.5
1510-02380	WRNF-145	145-138-20	145-20/3.5
1510-02420	WRNF-150	150-143-20	150-20/3.5
1510-02500	WRNF-160	160-153-20	160-20/3.5
	WRNF-150	150-143-20.5	150-20.5/3.5
	WRNF-086	86-79-25	86-25/3.5
1510-02200	WRNF-135	135-128-25	135-25/3.5
1510-02120	WRNF-130	130-123-30	130-30/3.5
	WRNF-140	140-133-35	140-35/3.5
	WRNF-130	130-123-40	130-40/3.5
	WRNF-160	160-153-40	160-40/3.5
	WRNF-140	140-133-45	140-45/3.5
1510-02440	WRNF-150	150-143-45	150-45/3.5
	WRNF-160	160-153-45	160-45/3.5
<b>4mm厚み</b>			
1510-01260	WRNF-100	100-92-5.8	100-5.8/4
1510-01620	WRNF-110	110-102-5.8	110-5.8/4
1510-01860	WRNF-120	120-112-5.8	120-5.8/4
	WRNF-090	90-82-5.9	90-5.9/4
	WRNF-115	115-107-5.9	115-5.9/4
1510-01600	WRNF-110	110-102-10	110-10/4
	WRNF-100	100-92-14.8	100-14.8/4
	WRNF-115	115-107-14.8	115-14.8/4



# WRNF ウェアリング

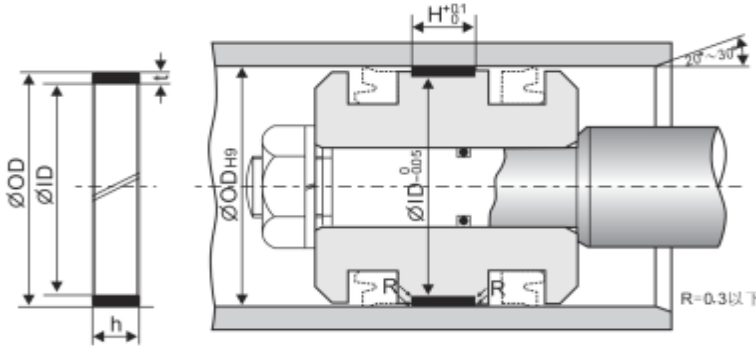


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
1510-02520	WRNF-165	165-157-14.8	165-14.8/4
	WRNF-170	170-162-14.8	170-14.8/4
	WRNF-160	160-152-15	160-15/4
	WRNF-165	165-157-15	165-15/4
	WRNF-190	190-182-17.8	190-17.8/4
1510-02310	WRNF-148	148-140-18	148-18/4
	WRNF-140	140-148-18	140-18/4
1510-02690	WRNF-190	190-182-18	190-18/4
	WRNF-190	190-182-20	190-20/4
	WRNF-170	170-162-22.5	170-22.5/4
	WRNF-180	180-172-22.5	180-22.5/4
	WRNF-200	200-192-22.5	200-22.5/4
1510-02580	WRNF-220	220-212-22.5	220-22.5/4
	WRNF-170	170-162-25	170-25/4
	WRNF-175	175-167-25	175-25/4
1510-02620	WRNF-190	190-182-25	190-25/4
	WRNF-225	225-217-25	225-25/4
	WRNF-250	250-242-25	250-25/4
	WRNF-225	225-217-29.5	225-29.5/4
1510-02800	WRNF-240	240-232-34.5	240-34.5/4
1510-02640	WRNF-180	180-172-45	180-45/4
	WRNF-200	200-192-45	200-45/4
1510-02600	WRNF-170	170-162-50	170-50/4
	WRNF-225	225-217-50	225-50/4
4.5mm厚み			
1510-01520	WRNF-110	110-101-5.9	110-5.9/4.5
	WRNF-120	120-111-5.9	120-5.9/4.5
	WRNF-115	115-106-9.8	115-9.8/4.5
	WRNF-120	120-111-9.8	120-9.8/4.5
	WRNF-125	125-116-9.8	125-9.8/4.5
1510-01040	WRNF-090	90-81-10	90-10/4.5
	WRNF-090	90-81-10	90-10/4.5
1510-01140	WRNF-095	95-86-10	95-10/4.5
	WRNF-100	100-91-10	100-10/4.5
	WRNF-100	100-91-10	100-10/4.5
1510-01220	WRNF-105	105-96-10	105-10/4.5
1510-01560	WRNF-110	110-101-10	110-10/4.5



# WRNF ウェアリング

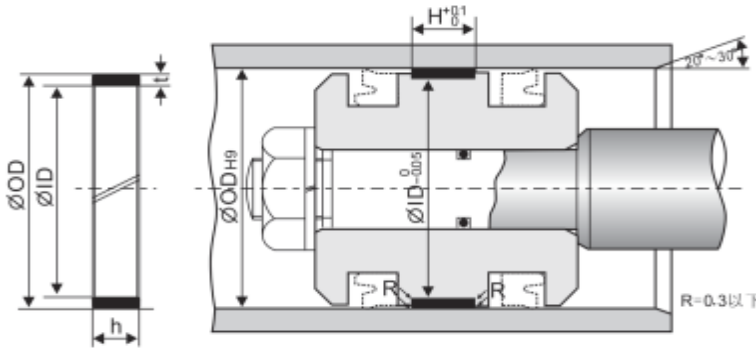


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
1510-01780	WRNF-115	115-106-10	115-10/4.5
1510-01820	WRNF-120	120-111-10	120-10/4.5
	WRNF-090	90-81-12.5	90-12.5/4.5
1510-01060	WRNF-090	90-81-12.5	90-12.5/4.5
1510-01160	WRNF-095	95-86-12.5	95-12.5/4.5
1510-01200	WRNF-100	100-91-12.5	100-12.5/4.5
1510-01220	WRNF-100	100-91-12.5	100-12.5/4.5
1510-01500	WRNF-105	105-96-12.5	105-12.5/4.5
1510-01580	WRNF-110	110-101-12.5	110-12.5/4.5
	WRNF-115	115-106-14.8	115-14.8/4.5
	WRNF-120	120-111-14.8	120-14.8/4.5
1510-01800	WRNF-115	115-106-15	115-15/4.5
1510-01840	WRNF-120	120-111-15	120-15/4.5
	WRNF-130	130-120-9.8	130-9.8/4.5
	WRNF-135	135-125-9.8	135-9.8/4.5
5mm厚み			
	WRNF-140	140-130-9.8	140-9.8/5
1510-02000	WRNF-125	125-115-10	125-10/5
1510-02060	WRNF-130	130-120-10	130-10/5
1510-02140	WRNF-135	135-125-10	135-10/5
	WRNF-130	130-120-14.8	130-14.8/5
1510-02160	WRNF-135	135-125-14.8	135-14.8/5
1510-02680	WRNF-185	185-175-14.8	185-14.8/5
1510-02020	WRNF-125	125-115-15	125-15/5
1510-02080	WRNF-130	130-120-15	130-15/5
5.5mm厚み			
	WRNF-225	225-214-50	225-50/5.5
6mm厚み			
1510-02280	WRNF-140	140-128-9.8	140-9.8/6
	WRNF-140	140-128-10	140-10/6
1510-02240	WRNF-140	140-128-12.5	140-12.5/6
	WRNF-145	145-133-12.5	145-12.5/6
1510-02320	WRNF-145	145-133-12.5	145-12.5/6
1510-02400	WRNF-150	150-138-12.5	150-12.5/6
1510-02460	WRNF-160	160-148-15	160-15/6
1510-02260	WRNF-140	140-128-17.5	140-17.5/6

# WRNF ウェアリング

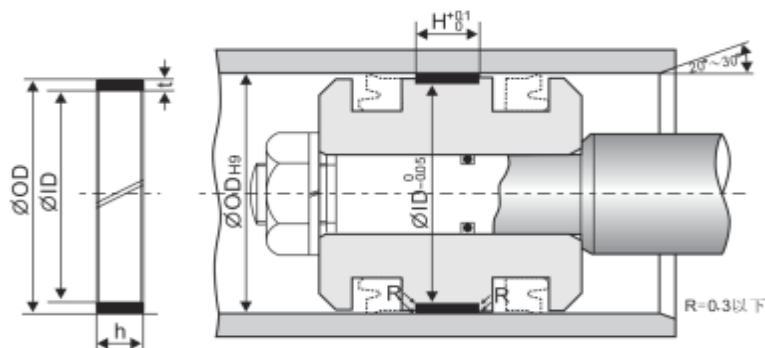


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
	WRNF-150	150-138-17.5	150-17.5/6
	WRNF-160	160-148-19.5	160-19.5/6
1510-02480	WRNF-160	160-148-20	160-20/6
1510-02560	WRNF-170	170-158-20	170-20/6
1510-02660	WRNF-185	185-173-22.5	185-22.5/6
1510-02700	WRNF-200	200-188-22.5	200-22.5/6
1510-02780	WRNF-225	225-213-25	225-25/6
1510-02840	WRNF-250	250-238-27.5	250-27.5/6
1510-02850	WRNF-300	300-288-30	300-30/6

# WRNF ウェアリング

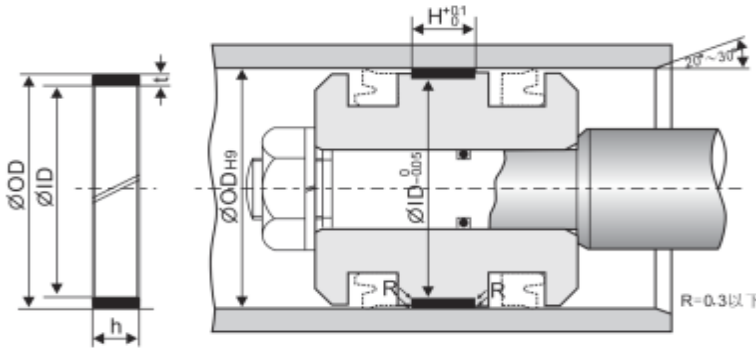


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
<b>KOMATSU</b>			
<b>純正品 製品番号</b>			
1510-01121		90-86-6	90-6/2
1510-01000		40-36-7.8	40-7.8/2
1510-01120		90-85-9.5	90-9.5/2
1510-02220		135-128-9.5	135-9.5/3.5
1510-01040		90-81-9.8	90-9.8/4.5
1510-02280		140-128-9.8	140-9.8/6
1510-01140	707-39-95030	95-86-10	95-10/4.5
1510-02000		125-115-10	125-10/5
1510-02340		145-138-10	145-10/3.5
1510-01060	707-39-90110	90-81-12.5	90-12.5/4.5
1510-01080		90-84-12.5	90-12.5/3
1510-01300		100-94-12.5	100-12.5/3
1510-02320		145-133-12.5	145-12.5/6
1510-02400	707-39-15110	150-138-12.5	150-12.5/6
1510-01320		100-94-14.5	100-14.5/3
1510-01020		50-44-14.8	50-14.8/3
1510-02100		130-123-14.8	130-14.8/3.5
1510-02160	707-39-13510	135-125-14.8	135-14.8/5
1510-02180		135-128-14.8	135-14.8/3.5
1510-02300		140-135-14.8	140-14.8/2.5
1510-02520		165-157-14.8	165-14.8/4
1510-02680		185-175-14.8	185-14.8/5
1510-02740		220-214-14.8	220-14.8/3
1510-01880		120-114-15	120-15/3
1510-02020		125-115-15	125-15/5
1510-02040		125-119-15	125-15/3
1510-02360		145-138-15	145-15/3.5
1510-02460		160-148-15	160-15/6
1510-02260	707-39-14820	140-128-17.5	140-17.5/6
1510-01340		100-94-20	100-20/3
1510-02380		145-138-20	145-20/3.5
1510-02420		150-143-20	150-20/3.5
1510-02480	707-39-16820	160-148-20	160-20/6
1510-02500		160-153-20	160-20/3.5
1510-02560	707-39-17820	170-158-20	170-20/6

# WRNF ウェアリング

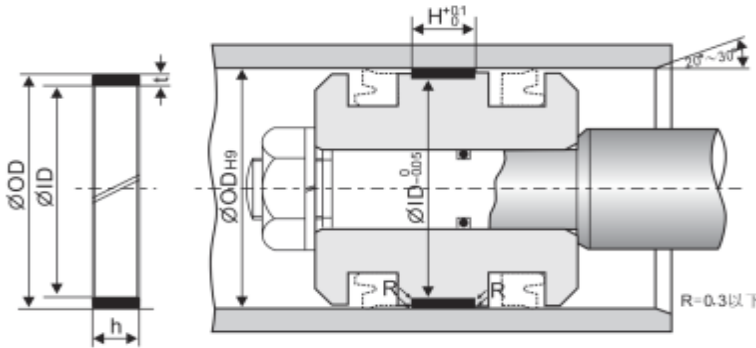


仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
1510-01380		100-94-22.4	100-22.4/3
1510-01940		120-114-22.4	120-22.4/3
1510-02660	707-39-18510	185-173-22.5	185-22.5/6
1510-02700		200-188-22.5	200-22.5/6
1510-01100		90-84-25	90-25/3
1510-01400		100-94-25	100-25/3
1510-01480		100-95-25	100-25/2.5
1510-02200		135-128-25	135-25/3.5
1510-02580		170-162-25	170-25/4
1510-02620		175-167-25	175-25/4
1510-02780		225-213-25	225-25/6
1510-02840		250-238-27.5	250-27.5/6
1510-02800		225-217-29.5	225-29.5/4
1510-01440		100-94-30	100-30/3
1510-01960		120-114-30	120-30/3
1510-02120		130-123-30	130-30/3.5
1510-02540		165-159-30	165-30/3
1510-02820		240-232-34.5	240-34.5/4
1510-02440		150-143-45	150-45/3.5
1510-02600		170-162-50	170-50/4
1510-02720		200-194-60	200-60/3
1510-02760		220-214-60	220-60/3
1510-01200	707-39-10020	100-91-10	100-10/4.5
1510-01500	707-39-10550	105-96-10	105-10/4.5
1510-01560		110-101-10	110-10/4.5
1510-01600	707-39-11150	110-102-10	110-10/4
1510-01780	707-39-11530	115-106-10	115-10/4.5
1510-01820	707-39-12140	120-111-10	120-10/4.5
1510-02060	707-39-13150	130-120-10	130-10/5
1510-02140	707-39-13530	135-125-10	135-10/5
1510-01160	707-39-95120	95-86-12.5	95-12.5/4.5
1510-01180	707-39-95110	95-89-12.5	95-12.5/3
1510-01220	707-39-10110	100-91-12.5	100-12.5/4.5
1510-01520	707-39-10520	105-96-12.5	105-12.5/4.5
1510-01540	707-39-10510	105-99-12.5	105-12.5/3
1510-01580	707-39-11110	110-101-12.5	110-12.5/4.5

# WRNF ウェアリング

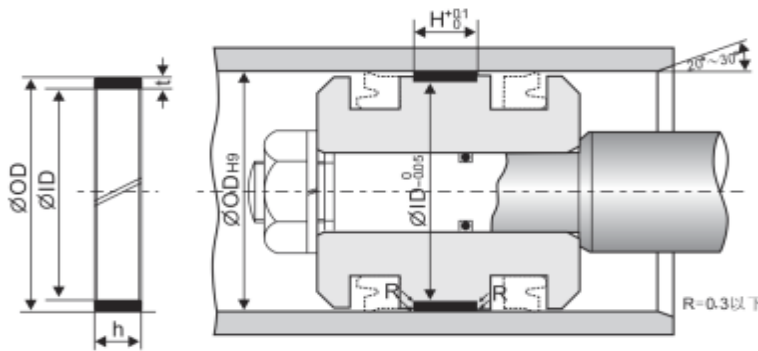

仕様	
材質	NY+グラスファイバー
温度域	-50°C~170°C
速度	1m/s

単位: mm

商品コード	型番	サイズ1(OD-ID-h)	サイズ2(OD-h/t)
1510-01660		110-104-12.5	110-12.5/3
1510-02240	707-39-14110	140-128-12.5	140-12.5/6
1510-01800	707-39-11510	115-106-15	115-15/4.5
1510-01840	707-39-12110	120-111-15	120-15/4.5
1510-02080	707-39-13110	130-120-15	130-15/5
1510-01720		110-104-25	110-25/3
1510-01740		110-104-30	110-30/3
1510-02850	707-39-30900	300-288-30	300-30/6
1510-02640	07155-01845	180-172-45	180-45/4

## キャタピラー用

## 純正品 製品番号

1510-01260	143-8025	100-92-5.8	100-5.8/4
1510-01280	283-5953	100-94-9	100-9/3
1510-01340		100-94-20	100-20/3
1510-01360	143-8024	100-94-22	100-22/3
1510-01860	143-8027	120-112-5.8	120-5.8/4
1510-01920	143-8028	120-114-22	120-22/3
1510-01680	143-8030	110-104-22	110-22/3
1510-01620	143-8031	110-102-5.8	110-5.8/4
1510-01460	143-8033	100-94-5.6	100-5.6/3
1510-01760	143-8034	110-104-5.6	110-5.6/3
1510-01980	143-8035	120-114-5.6	120-5.6/3
1510-01280	283-5953	100-94-9	100-9/3
1510-01640	283-5927	110-104-11.1	110-11.1/3
1510-01900	283-5940	120-114-11.1	120-11.1/3

## ヨーロッパ標準サイズ

1510-01120	WRNF 90-2.5	90-85-9.5	90-9.5/2.5
------------	-------------	-----------	------------

コマツ、KYB製の油圧シリンダー及びキャタピラーの最近の機種では、フェノール樹脂製ウェアリングから

ナイロン、ポリエステル他の耐荷重性と耐熱特性に優れた材質へ変更されております。フェノール樹脂では最新の油圧シリンダーの仕様には向いておらず、破損する危険性があります。