


TAS ピストンシール (DASコンパクトシール互換品)

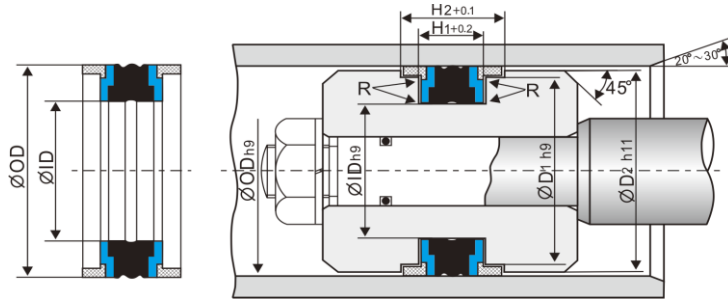


仕様	
材質	POM+HY+NBR
温度域	-30°C~100°C
圧力	400kgf/cm ²
速度	0.5m/s

単位:mm

商品コード	型番	OD	ID	H1	H2	D1	D2
1010-40000	TAS-020	20	11	13.5	17.7	17.00	19.0
1010-40010	TAS-025-15-12	25	15	12	20	21.00	23.0
1010-40020	TAS-025-15-16.4	25	15	16.4	29.1	21.45	23.5
1010-40030	TAS-028	28	19	13.5	17.7	25.00	27.0
1010-40040	TAS-030	30	21	13.5	17.7	27.00	29.0
1010-40050	TAS-032-22-15.5	32	22	15.5	20.7	28.00	31.0
1010-40060	TAS-032-22-16.4	32	22	16.4	29.1	28.50	30.5
1010-40070	TAS-035-25-15.5	35	25	15.5	20.7	31.00	34.0
1010-40080	TAS-035-25-16.4	35	25	16.4	29.1	31.40	33.5
1010-40090	TAS-040-24-18.4	40	24	18.4	31.1	35.40	38.5
1010-40100	TAS-040-30-12.5	40	30	12.5	20.5	36.00	38.0
1010-40110	TAS-040-30-16.4	40	30	16.4	29.1	35.40	38.5
1010-40120	TAS-045-29-18.4	45	29	18.4	31.1	40.40	44.0
1010-40130	TAS-045-31-15.5	45	31	15.5	20.7	41.00	44.0
1010-40140	TAS-045-35-16.4	45	35	16.4	29.1	40.40	43.5
1010-40150	TAS-050-34-18.4	50	34	18.4	31.1	45.40	48.5
1010-40160	TAS-050-34-20.5	50	34	20.5	26.7	46.00	49.0
1010-40170	TAS-050-38-20.5	50	38	20.5	28.9	46.00	49.0
1010-40180	TAS-055-39-18.4	55	39	18.4	31.1	50.36	53.5
1010-40190	TAS-055-39-20.5	55	39	20.5	26.7	51.00	54.0
1010-40200	TAS-060-44-18.4	60	44	18.4	31.1	55.40	58.5
1010-40210	TAS-060-44-20.5	60	44	20.5	26.7	56.00	59.0
1010-40220	TAS-063-47-18.4	63	47	18.4	31.1	58.40	61.5
1010-40230	TAS-063-47-19.4	63	47	19.4	32.1	58.40	61.5
1010-40240	TAS-063-47-20.5	63	47	20.5	26.7	59.00	62.0
1010-40250	TAS-065-49-20.5	65	49	20.5	26.7	61.00	64.0
1010-40260	TAS-065-50-18.4	65	50	18.4	31.1	60.40	63.5
1010-40270	TAS-070-50-22.4	70	50	22.4	35.1	64.20	68.3
1010-40280	TAS-070-54-20.5	70	54	20.5	26.7	66.00	69.0
1010-40290	TAS-075-55-22.4	75	55	22.4	35.1	69.20	73.3
1010-40300	TAS-080-60-22.4	80	60	22.4	35.1	74.15	78.3
1010-40310	TAS-080-62-22.4	80	62	22.4	29.7	76.00	79.0
1010-40320	TAS-085-65-22.4	85	65	22.4	35.1	79.15	83.3
1010-40330	TAS-090-70-22.4	90	70	22.4	35.1	84.15	88.3
1010-40340	TAS-090-72-22.4	90	72	22.4	29.7	86.00	89.0
1010-40350	TAS-095-75-22.4	95	75	22.4	35.1	89.15	93.3
1010-40360	TAS-100-75-22.4	100	75	22.4	35.1	93.15	98.0
1010-40370	TAS-100-82-22.4	100	82	22.4	29.7	96.00	99.0
1010-40380	TAS-105-80-22.4	105	80	22.4	35.1	98.10	103.0
1010-40390	TAS-110-85-22.4	110	85	22.4	35.1	103.10	108.0

TAS ピストンシール (DASコンパクトシール互換品)

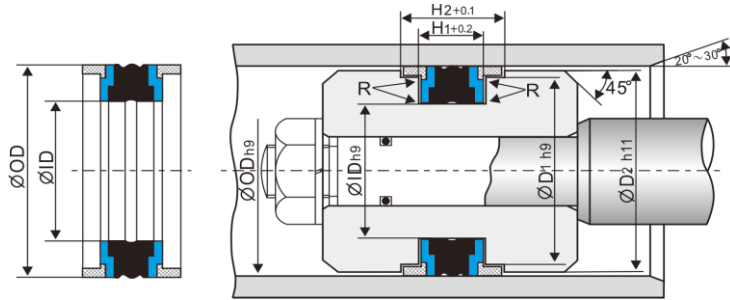


仕様	
材質	POM+HY+NBR
温度域	-30°C~100°C
圧力	400kgf/cm ²
速度	0.5m/s

単位:mm

商品コード	型番	OD	ID	H1	H2	D1	D2
1010-40400	TAS-110-92-22.4	110	92	22.4	29.7	106.00	109.0
1010-40410	TAS-115-90-22.4	115	90	22.4	35.1	108.10	113.0
1010-40420	TAS-115-97-22.4	115	97	22.4	29.7	111.00	114.0
1010-40430	TAS-120-95-22.4	120	95	22.4	35.1	113.10	118.1
1010-40440	TAS-120-106-22.4	120	106	22.4	32.9	116.00	118.5
1010-40450	TAS-125-100-25.4	125	100	25.4	38.1	118.10	123.0
1010-40460	TAS-125-103-26.5	125	103	26.5	36.7	121.00	124.0
1010-40470	TAS-130-105-25.4	130	105	25.4	38.1	123.10	128.0
1010-40480	TAS-130-105-25.4	130	105	25.4	44.4	122.60	127.5
1010-40490	TAS-135-110-25.4	135	110	25.4	38.1	128.10	133.0
1010-40500	TAS-135-110-25.4	135	110	25.4	44.4	127.60	132.5
1010-40510	TAS-140-115-25.4-38.1	140	115	25.4	38.1	133.00	138.0
1010-40520	TAS-140-115-25.4-44.4	140	115	25.4	44.4	132.60	137.5
1010-40530	TAS-145-120-25.4-38.1	145	120	25.4	38.1	138.30	142.95
1010-40540	TAS-145-120-25.4-44.4	145	120	25.4	44.4	137.60	142.5
1010-40550	TAS-150-125-25.4-38.1	150	125	25.4	38.1	143.00	148.0
1010-40560	TAS-150-125-25.4-44.4	150	125	25.4	44.4	142.60	147.5
1010-40570	TAS-160-135-25.4-44.4	160	135	25.4	44.4	152.60	157.5
1010-40580	TAS-160-138-26.5	160	138	26.5	36.7	156.00	159.0
1010-40590	TAS-165-140-25.4	165	140	25.4	44.4	157.60	162.5
1010-40600	TAS-170-145-25.4	170	145	25.4	50.8	161.70	167.1
1010-40610	TAS-175-150-25.4	175	150	25.4	50.8	166.70	172.1
1010-40620	TAS-180-150-35.4	180	150	35.4	48.1	172.95	177.87
1010-40630	TAS-180-155-25.4	180	155	25.4	50.8	171.70	177.1
1010-40640	TAS-185-160-25.4	185	160	25.4	50.8	176.70	182.1
1010-40650	TAS-200-175-25.4	200	175	25.4	50.8	191.60	197.0
1010-40660	TAS-210-185-25.4	210	185	25.4	50.8	201.60	207.0
1010-40670	TAS-215	215	190	25.4	50.8	206.60	214.0
1010-40680	TAS-220	220	195	25.4	50.8	211.60	217.0
1010-40690	TAS-250	250	225	25.4	50.8	241.60	247.0

*バックアップリングの色は青と白がありますが指定できません。

TAS ピストンシール (DASコンパクトシール互換品)

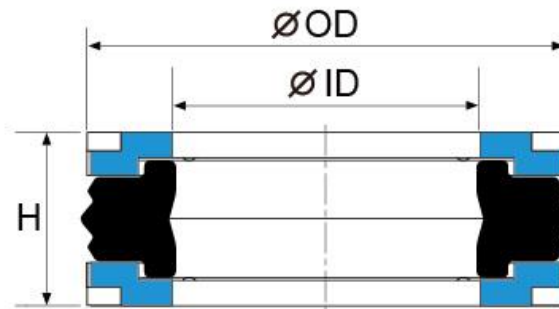

商品コード	型番	OD	ID	H1	H2	D2
1010-40700	TAS-125	125	100	25.4	25.4	123
1010-40710	TAS-135	135	110	25.4	25.4	132.5
1010-40720	TAS-145	145	120	25.4	25.4	142.5